






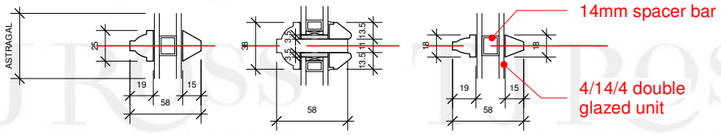



25mm
astragal
Note 2


Alternative
38mm astragal
Note 1

Alternative
18mm astragal
Note 2




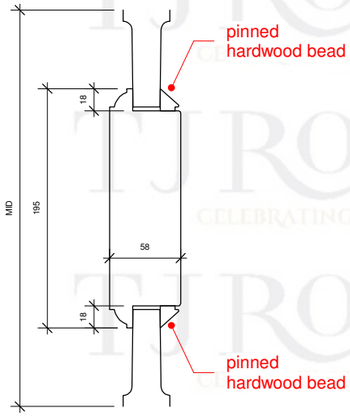

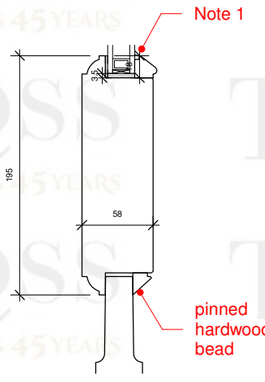


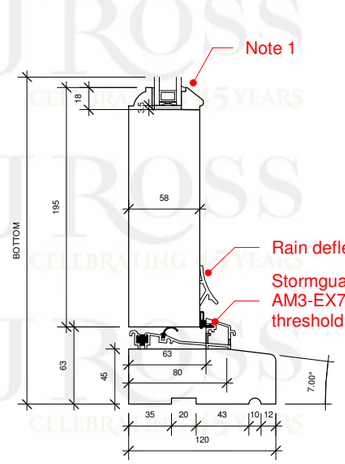


Threshold (Glazed)
Sectional Detail
1:5

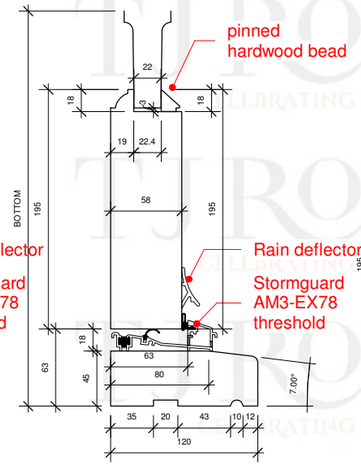


Threshold (Panelled)
Sectional Detail
1:5

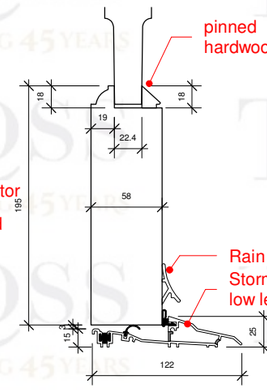


Level Acces (Panelled)
Sectional Detail
1:5

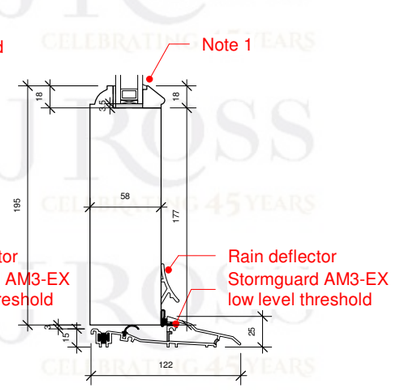


Level Access (Glazed)
Sectional Detail
1:5

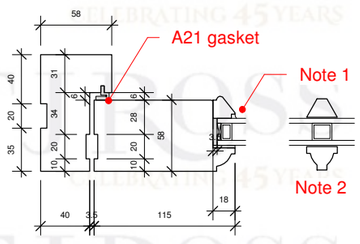

(Glazed)
Plan Detail
1:5

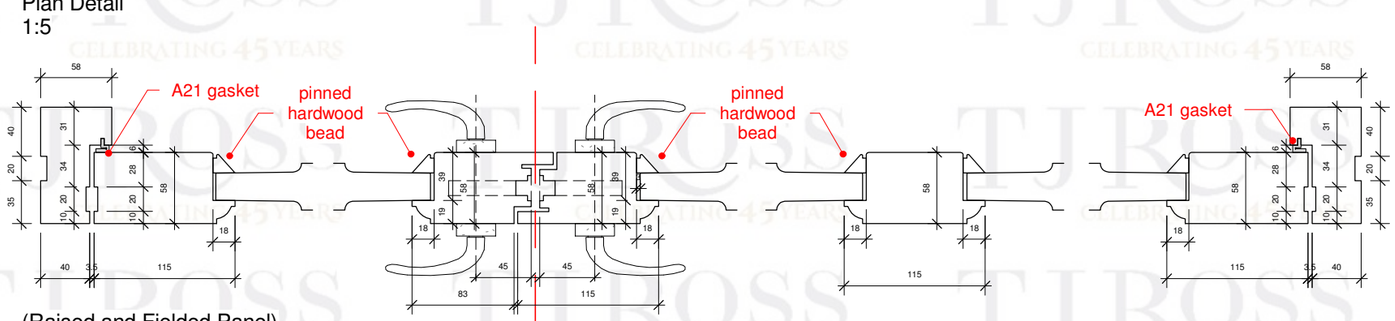

(Raised and Fielded Panel)
Plan Detail
1:5

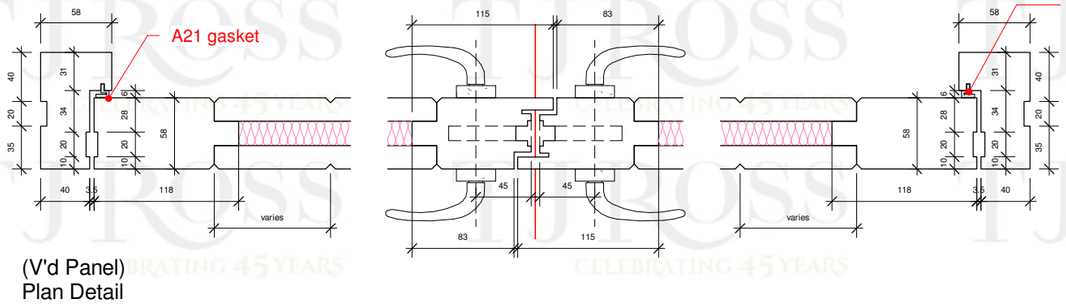

(V'd Panel)
Plan Detail
1:5

Note 1
Internal Seal: 2mm security tape
Perimeter Seal: Silfix U9 perimeter seal
External Seal: hardwood glazing bead with silicone sealant to glass

Note 2
Astragals adhered to glazing with 1.6mm security tape

Rev	Description	Auth	Date
B	Thresholds updated. Head check updated.	RMcl	12/03/21
A	Bottom check removed. Meeting point updated. Hinge check in frame updated.	RMcl	10/03/21

REVISION

DRAWING TITLE
Double Door
Inward Opening
Ogee Profile

PROJECT
Standard Details

DATE CREATED	DESIGNER	SCALE @ A3
05/03/21	RMcl	1 : 5

DRAWING NUMBER	REVISION
DblDr_In_OG	B

TJROSS