

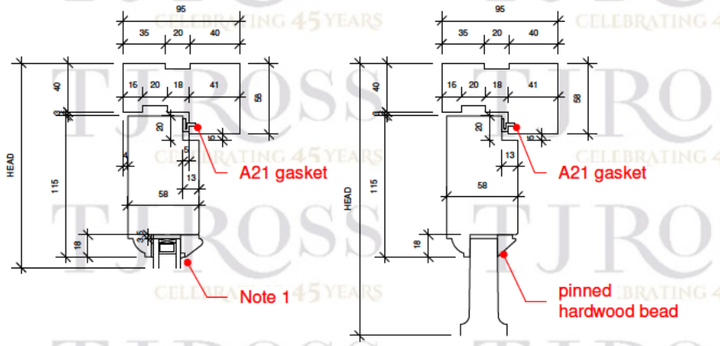





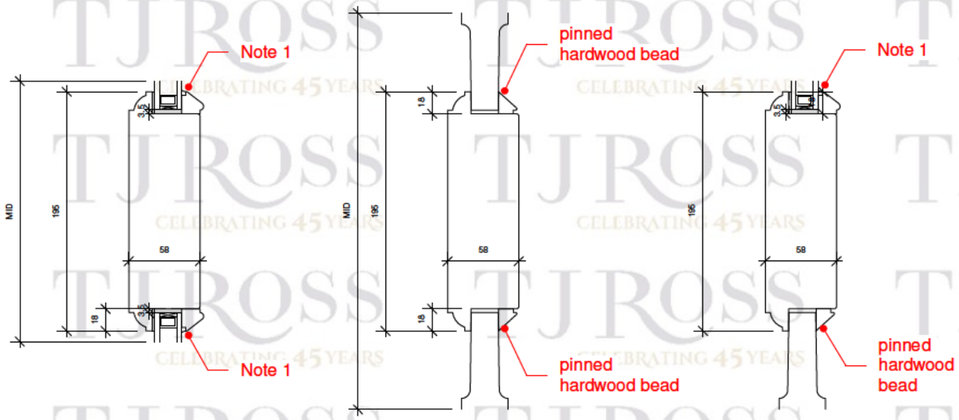

25mm astragal
Note 2


Alternative 38mm astragal
Note 1

Alternative 18mm astragal
Note 2

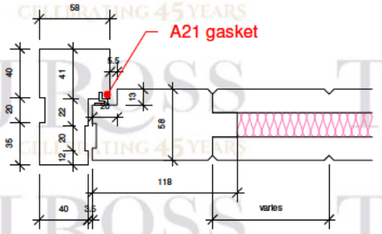








(V'd Panel)
Plan Detail
1:5

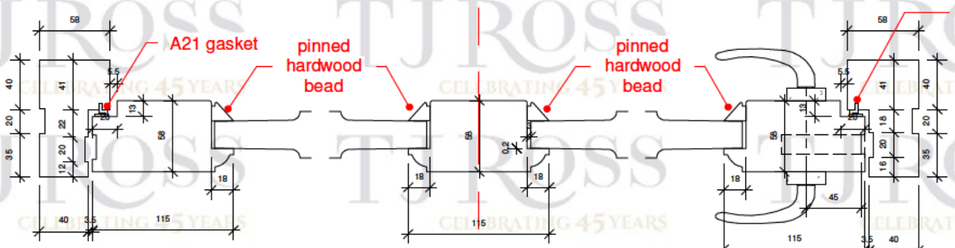



(Raised and Fielded Panel)
Plan Detail
1:5








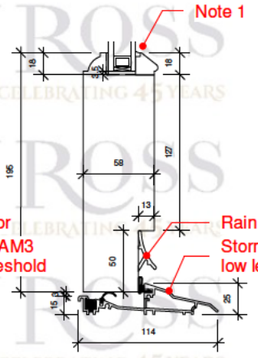


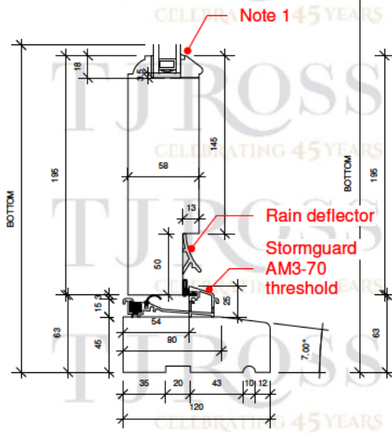

(Glazed)
Plan Detail
1:5

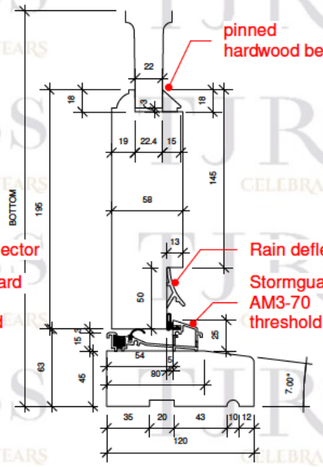

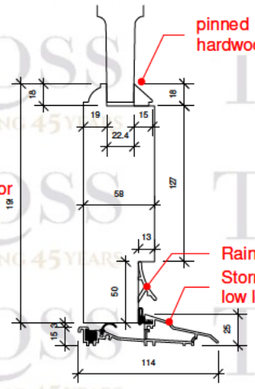
Threshold (Glazed)
Sectional Detail
1:5

Threshold (Panelled)
Sectional Detail
1:5

Level Acces (Panelled)
Sectional Detail
1:5

Level Access (Glazed)
Sectional Detail
1:5

Note 1
Internal Seal: 2mm security tape
Perimeter Seal: Silfix U9 perimeter seal
External Seal: hardwood glazing bead with silicone sealant to glass

Note 2
Astragals adhered to glazing with 1.6mm security tape

| Rev | Description | Auth | Date |
|---|---|---|---|
| F | Threshold specification note updated. | RMcl | 05/03/21 |
| E | Note corrected. | RMcl | 03/03/21 |
| D | Notes added. | RMcl | 11/02/21 |
| C | Door panel bead updated. | RMcl | 20/01/21 |
| B | Door check amended to 5mm. V panel detail added. | RMcl | 14/01/21 |

REVISION

DRAWING TITLE
Single Door
Inward Opening
Ogee Profile

PROJECT
Standard Details

| DATE CREATED | DESIGNER | SCALE @ A3 |
|---|---|---|
| 01/12/20 | RMcl | 1 : 5 |

| DRAWING NUMBER | REVISION |
|---|---|
| SglDr_In_OG | F |

TJROSS